



# HS-P1500 SERIES POWERED COAXIAL ARRAY SPEAKERS



***High quality sound delivered for  
both portable use and fixed installation***

## HS-P1500 Series Powered Coaxial Array Speaker

HS-P1500 Series Powered Coaxial Array Speakers are equipped with narrow directivity control (90° horizontal x 40° vertical) to deliver a clear and well-balanced sound. It is installed with a built-in digital amplifier of 170W rated output, has an aux input and a combined line/mic input. This makes it suitable for portable use, such as in events, or fixed sound installation.


### Features:

- 170W rated output
- Two audio inputs (AUX x 1, Selectable LINE/MIC x 1)
- Line out to connect additional speaker
- Bass and treble control for better acoustics
- 90° horizontal x 40° vertical directivity control
- Built-in overload protection circuitry for the tweeters, disconnects the power amplifier's output when unusual temperature rise occurs
- Available in black or white color

### Specifications

Model	HS-P1500B AS	HS-1500W AS
Enclosure	Sealed Type	
Power Source	220 - 240V AC (50/60Hz)	
Rated Output	170W	
Power Consumption	100W	
Sensitivity	98 dB (1W, 1m)	
Frequency Response	60Hz - 20,000Hz	
Crossover Frequency	3 kHz	
Directivity Angle	Horizontal: 90°, Vertical: 40°	
Speaker Component	Low frequency: 38cm (15") cone-type, High frequency: Balanced dome tweeter x 6	
Input	MIC/LINE: XLR-3-31 type combination connector (balanced/unbalanced, -60dB/0dB selective) AUX: XLR-3-31 type combination connector, -10dB unbalanced	
Output	Line Out: XLR-3-31 type connector, 0dB unbalanced	
Tone Control	Bass: ±10dB at 100Hz, Treble: ±10dB at 10kHz	
Operating Temperature	-10°C to 40°C	
Finish	Enclosure: Polypropylene, black Punched Net: Surface-treated steel plate, black	Enclosure: Polypropylene, white Punched Net: Surface-treated steel plate, white
Dimensions	451 (W) x 560 (H) x 400 (D) mm (17.76" x 22.04" x 17.75")	
Weight	16kg (35.2 lb)	
Accessory	Power cord (2m)...1, Handle...1, Handle fitting bracket...2, Rubber foot...2, Screw M6 x 20...4	
Optional	Mounting bracket: HY-1500VB, HY-1500HB; Ceiling mount bracket: HY-C0801; Wall mount bracket: HY-W0801; Speaker stand: ST-34B	Mounting bracket: HY-1500VW, HY-1500HW; Ceiling mount bracket: HY-C0801W; Wall mount bracket: HY-W0801W; Speaker stand: ST-34B

### Connection Example

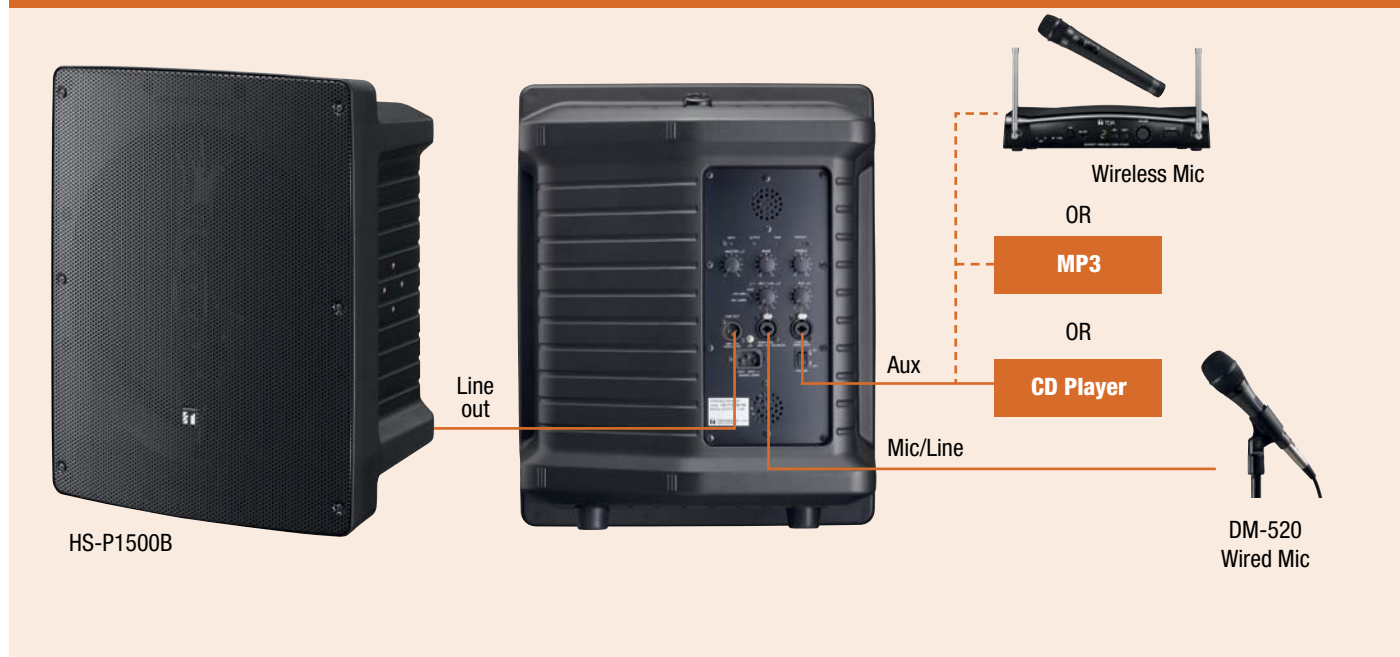

Human Society with  
Sound & Communication

TOA Electronics Pte Ltd

www.toa.com.sg

Specifications are subject to change without notice.  
Printed in Singapore (65) 865-0212-02A