



MULTICHANNEL POWER AMPLIFIER

DA-250FH
(CE301/CE-GB/CE-AU)

DESCRIPTION

The DA-250FH is a 4-Channel Digital Power Amplifier designed for 100 V line high-impedance distribution and features lightweight, compact, high power output, and high efficiency. It delivers 250 W × 4 channels (40 Ω output) using a switching power supply. Each channel is equipped with an independent power section. It can be electrically isolated from the high-impedance speaker system by attaching the MT-251H Output Transformer (optional). It can be mounted in an EIA Standard equipment rack (1 unit size).


SPECIFICATIONS

*0 dB = 0.775 V

Power Source	220 – 240 V AC, 50/60 Hz
Amplification System	Class D
Power Consumption	294 W (based on EN standards) 1150 W (rated output 100 V line, 40 Ω × 4)
Input	4 circuits, +4 dB* (1.23 V) (input level control in maximum position), 10 kΩ, electronically-balanced, removable terminal block (3 pins) CH 1 mode ON/OFF switch (ON: CH 1 to All ch, OFF: Each ch)
Rated Output	4 channels: 250 W × 4 (100 V line, 40 Ω) M4 screw terminal, distance between barriers: 8.8 mm (0.35")
Frequency Response	50 Hz – 20 kHz (-3 dB, +1 dB)
Total Harmonic Distortion	0.1 % (1 kHz) 0.3 % (100 Hz – 20 kHz)
Protection Circuit	Protection against excessive current flow due to overload, short circuit, unusual DC voltage output, temperature rise at power amp. heat sink (110 °C (230 °F) or more), temperature rise inside the unit (80 °C (176 °F) or more)
S/N Ratio	100 dB (A-weighted)
Crosstalk	70 dB (A-weighted)
LED Indicator	Power (blue) × 1, Input (green) × 4, Output (yellow) × 4, Peak (red) × 4, Protect (red) × 4
Cooling	Forced air cooling
Operating Temperature	-10 °C to +40 °C (14 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Panel: Aluminum, black, alumite Case: Plated steel sheet
Dimensions	482 (W) × 44 (H) × 401.8 (D) mm (18.98" × 1.73" × 15.82")
Weight	6.8 kg (14.99 lb)
Accessory	Power cord (2 m (6.56 ft)) ...1, Removable terminal plug (3 pins) ...4, Tamper-proof cap ...4, Rack mounting screw (with plain washer) ...4
Option	Matching transformer: MT-251H

TOA MULTICHANNEL POWER AMPLIFIER DA-250FH (CE301/CE-GB/CE-AU)


■ APPEARANCE

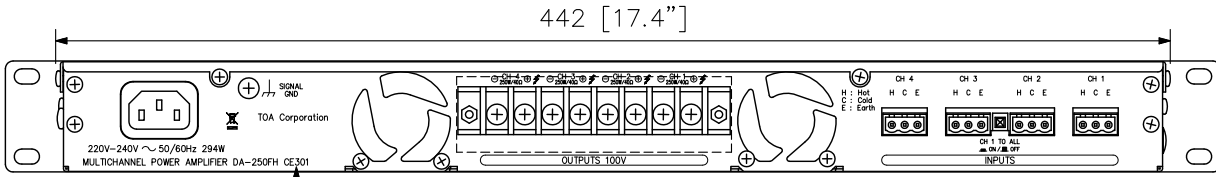


Other product versions CE-GB and CE-AU are available depending on the power cord type.

Rear View

MODEL	AC plug
CE301	
CE-GB	
CE-AU	

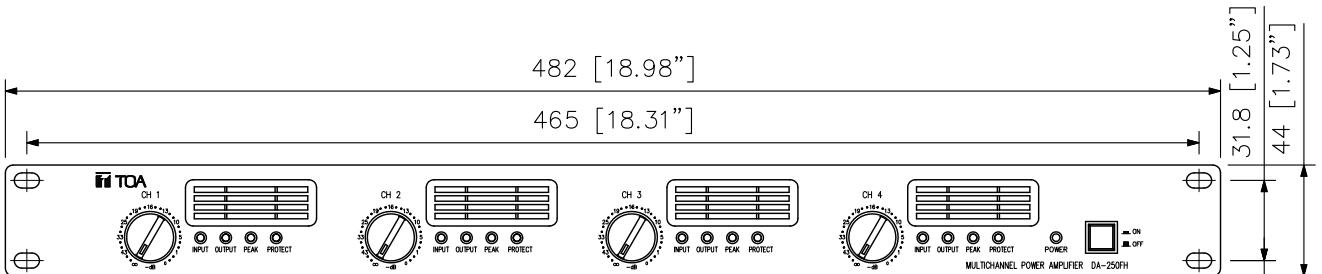

Front View

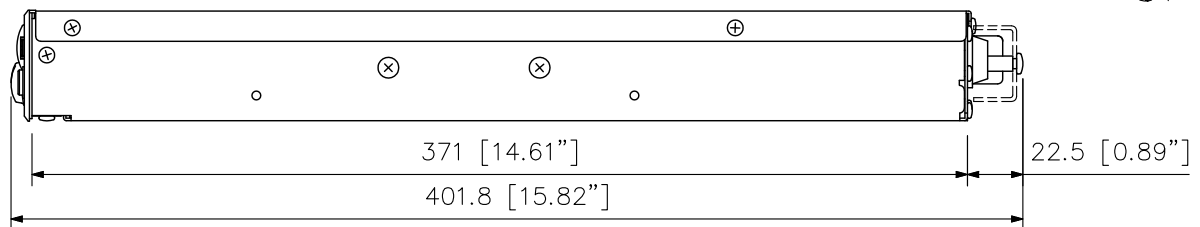

Side View

UNIT: mm SCALE: 1/3