


DESCRIPTION

The HB-1 is a high-power, wall/ceiling-mounted subwoofer system employing a 20 cm speaker unit. Although small in size, the HB-1 provides clear super-low frequency sound reproduction thanks to its Acoustic Super Woofer enclosure construction.

SPECIFICATIONS

Enclosure	Acoustic Super Woofer
Power Handling Capacity	240 W (Continuous program, 40 – 200 Hz) 80 W (Continuous pink noise, 40 – 200 Hz)
Rated Impedance	8 Ω
Sound Pressure Level	91 dB (1 W, 1 m) installation in 1/2 free sound field (Measured by installing the unit in the center of a ceiling or wall.) 85 dB (1 W, 1 m) installation in free sound field (Measured in anechoic chamber.)
Frequency Response	45 – 200 Hz (–10 dB) installation in 1/2 free sound field (Measured by installing the unit in the center of a ceiling or wall.)
Speaker Component	20 cm cone speaker
Input Terminal	Detachable screw terminal, (+)/(-) 2 each (for bridging connection)
Usable Cable	Solid cable, stranded cable: 0.2 – 2.5 mm ² (AWG No.24 – 14)
Finish	Enclosure: Steel plate, black, paint Front frame: Fire-resistant ABS resin, off-white, paint Punched net: Steel plate, off-white, paint Mounting bracket: Steel plate, black, paint
Dimensions	430 (W) × 544 (H) × 135 (D) mm
Weight	11 kg (including front grille and mounting bracket)
Accessory	Front frame.....1, Mounting bracket.....1set, Anchor piece.....2, Stud holder.....4, Screw.....1set
Option	Matching transformer: MT-S0601 (rated 60 W)

APPEARANCE

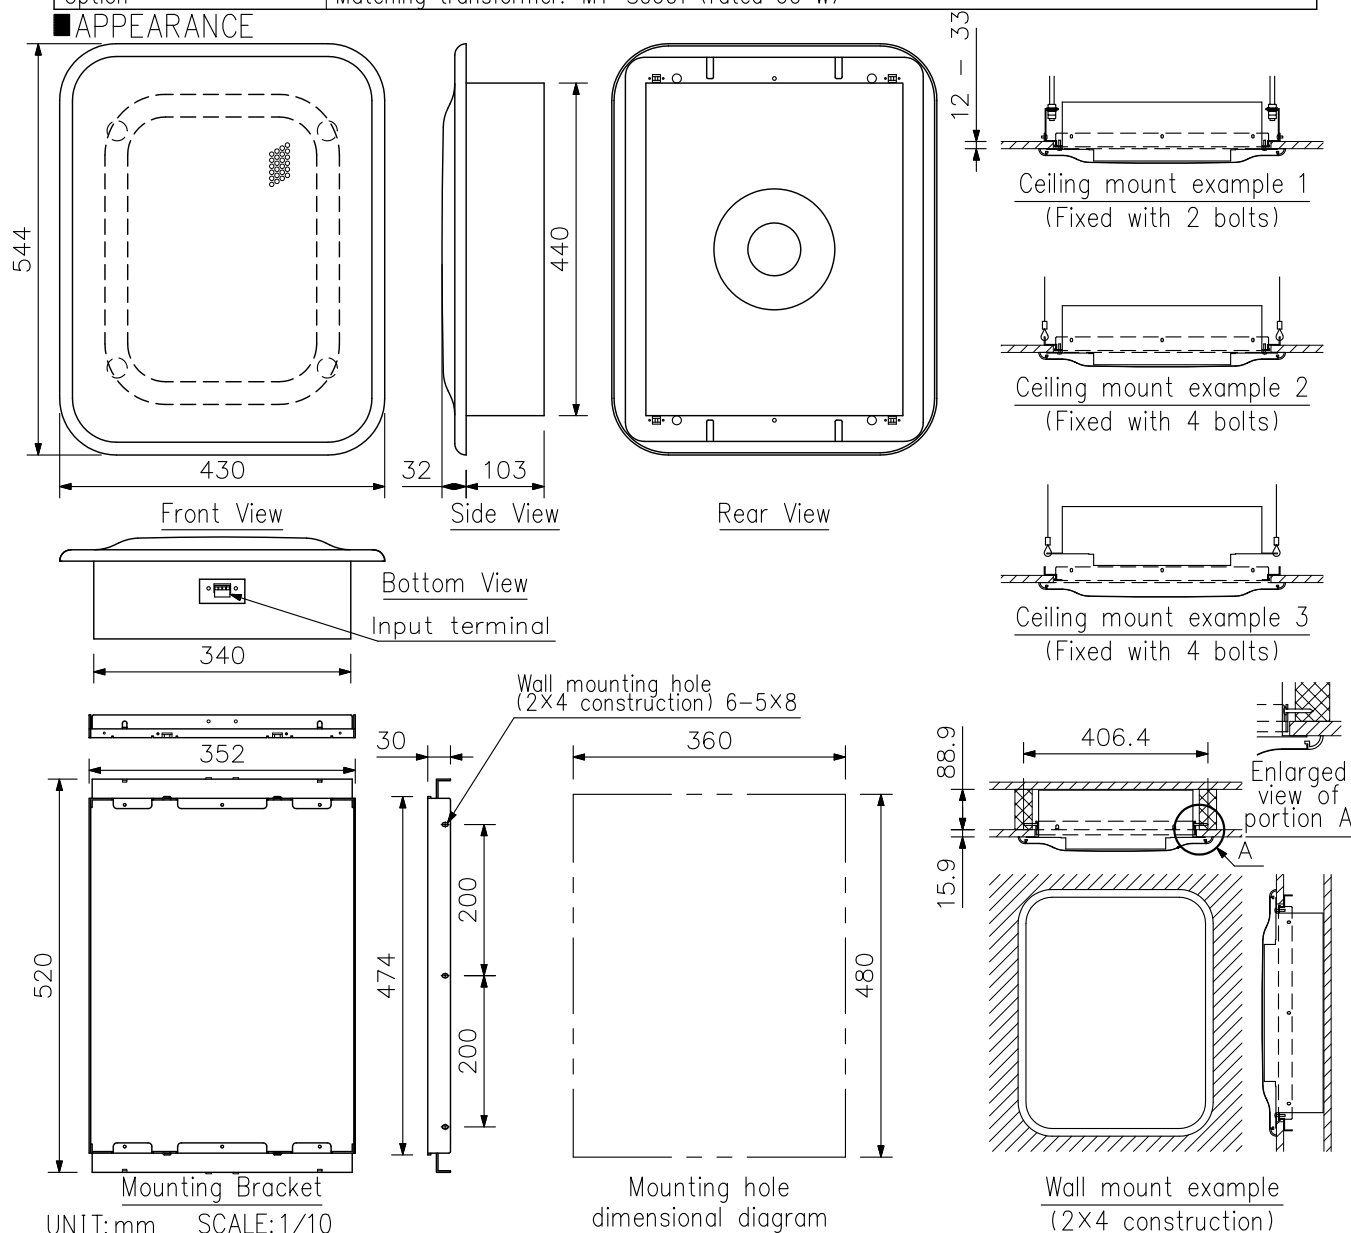

UNIT:mm SCALE:1/10